

MANIRENTA







Tel: +370 612 77556
Email: info@manirenta.lt
www.manirenta.lt

SPECIFICATION

CORTX rotor type debarker combines rotary action and friction by log to log contact for efficient bark removal. The results are properly debarked logs even from difficult and widely varying wood species in any operating conditions. High throughput capacity is guaranteed even for small diameter logs. Logs are transported through debarker by incline frame construction.

CORTX rotor type debarker is designed as a modular system to be adapted to the requirements of the customer. Smaller capacity **CORTX** debarker has unloading option from the operating side. Can be fitted with: bark removal transporter, loading and unloading conveyors.

МОДЕЛЬ MODEL	CORTX-30	CORTX-12
Производительность (м³/ч) Capacity (m³/h)	23-35	10-12
Диаметр обрабатываемого бревна (мм) Log diameter (mm)	60 - 600	60-500
Общее эл. потребление (кВт) Total el. power (kW)	85	45
Ножи HARDOX Knifes HARDOX	+	-/+
Укрепление боковых стенок „Hardox“ 6mm Strengthening the side walls „Hardox“ 6mm	+	-/+
Максимальная длина бревна (мм) Max length log (mm)	9000	4000
Чистота очистки от коры (%) Efficiency (%)	~95%	~95%
Количество эл. моторов Quantity of el. motors	4	4
Габариты станка (мм) Dimensions (mm)	10200/2300/3125	5100/2300/2800
Масса станка (кг) Weight (kg)	23000	9000

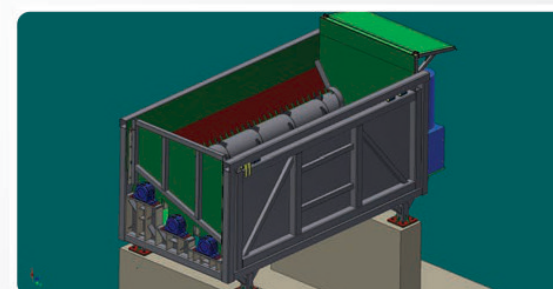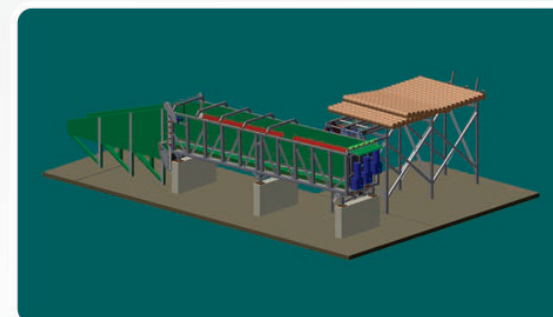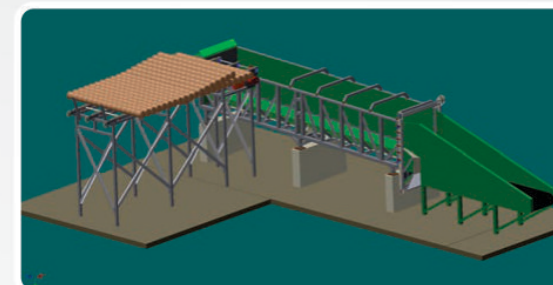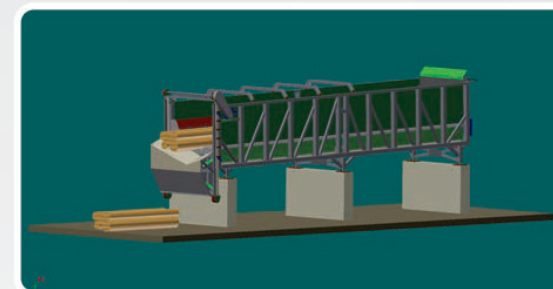

MANIRENTA